
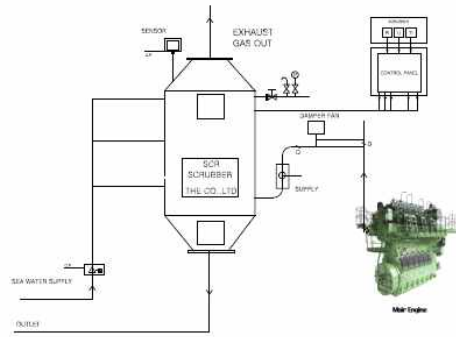


# Scrubber, engine exhaust gas

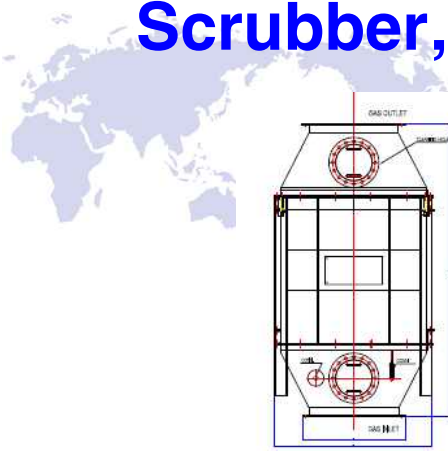

MODEL	WORKING PRESSURE (Mpa)	DIESEL ENGINE (hp)	DIMENSION			WEIGHT TON
			A	B	H	
TSMG-2500	0.1~0.5	2500	1450	1450	2500	2.2
TSMG-3000	"	3000	1450	1450	2600	2.5
TSMG-3500	"	3500	1600	1600	2700	2.6
TSMG-4000	"	4000	1600	1600	2800	2.7
TSMG-4500	"	4500	1700	1700	2800	3.0
TSMG-5000	"	5000	1800	1800	2800	3.4
TSMG-6000	"	6000	2000	2000	3000	3.9
TSMG-7000	"	7000	2300	2300	3150	3.5
TSMG-8000	"	8000	2400	2400	3200	4.5
TSMG-9000	"	9000	2400	2400	3200	4.9
TSMG-10000	"	10000	2500	2500	3300	6.0
TSMG-12000	"	12000	2600	2600	3500	6.2
TSMG-14000	"	14000	2700	2700	3700	6.5
TSMG-16000	"	16000	2800	2800	3900	6.7
TSMG-18000	"	18000	3200	3200	4300	6.9
TSMG-23000	"	23000	3500	3500	4780	7.9
TSMG-30000	"	30000	3950	3950	5100	8.9
TSMG-35000	"	35000	4300	4300	5550	9.3
TSMG-41000	"	41000	4590	4590	6000	9.6
TSMG-50000	"	50000	5000	5000	6500	9.9

Low SOx Scrubber, SCR type. IMO NOx Tier Regulations. Use: Diesel engine [exhaust gas](#)

Size error ± . Design : De SOx Scrubber. The specification are subject to change with out

From 2020, the IMO enforced the'Marpol Annex VI', which limits sulfur oxide emissions from the current 3.5% to 0.5%.

An engine exhaust gas scrubber needs to be installed, and the ship can be operated only when the engine fuel is responded using LNG fuel.



[thecoltd@naver.com](mailto:thecoltd@naver.com) tel' +82-51-831-1807 FAX +82-51-831-1819

[www.tkic.co.kr](http://www.tkic.co.kr)